

Pure Sine Wave Inverters



DC to AC Inverters
150 W | 300 W | 600 W

-Premium pure sine inverters!
-For RVs, boats, cars and trucks
-Innovative, compact design

Pure Sine Wave Power!

Go Power!™ pure sine wave inverters are the ultimate choice for appliances and equipment that demand a clean, pure source of AC power. The Go Power! line of pure sine wave inverters are guaranteed to run any load within their wattage range.

Ideal for:

Consumer Electronics

TVs, VCRs, stereos, lighting, fans, video game systems, DVD players, small battery charger and cell phone chargers.

Office Equipment


Laptop and desktop computers, printers, fax machines, and monitors.

Use anywhere including:

- RVs and Campers
- Boats
- Mobile Electronics
- Long Haul Trucks
- Mobile Service
- Utility Trucks



The Go Power! SW150 W, SW300 W and SW600 W Inverters are pictured above (from left to right)

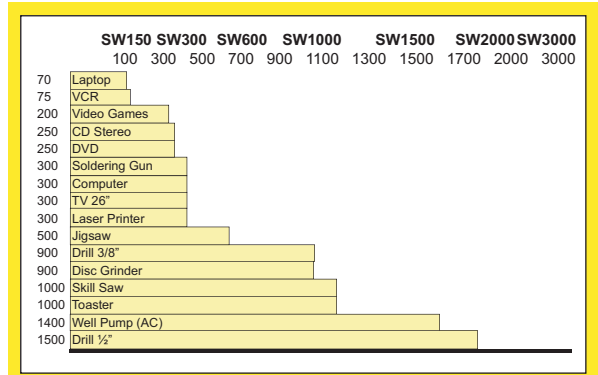

Specifications*	GP-SW150		GP-SW300		GP-SW600	
	12 V	24 V	12 V	24 V	12 V	24 V
Continuous Output Power	150 W		300 W		600 W	
Surge Rating	260 W		450 W		860 W	
Output Waveform	Sine Wave <3% THD		Sine Wave <3% THD		Sine Wave <3% THD	
Output Voltage ± 3%	115 VAC RMS		115 VAC RMS		115 VAC RMS	
Output Frequency ± 0.05%	50 / 60 Hz adjustable		50 / 60 Hz adjustable		50 / 60 Hz adjustable	
Input Voltage	10.5-15 VDC	21.0-30.0 VDC	10.5-15 VDC	21.0-30.0 VDC	10.5-15 VDC	21.0-30.0 VDC
Efficiency	80-90%		80 - 90%		85-92%	
No Load Current Draw	0.20 A	0.15 A	0.26 A	0.23 A	0.90 A	0.50A
Protection	Overload, Short Circuit, Reverse Polarity (Fuse), Over/Under Voltage, Over Temperature					
Low Battery Alarm ± 2%	10.5 V	21.0 V	10.5 V	21.0 V	10.5 V	21.0 V
Low Battery Shut-Down ± 2%	10.0 V	20.0 V	10.0 V	20.0 V	10.0 V	20.0 V
Operating Temperature Range	0 - 40°C / 32°F - 104°F		0 - 40°C / 32°F - 104°F		0 - 40°C / 32°F - 104°F	
Storage Temperature Range	-30°C - 70°C / -22°F - 158°F		-30°C - 70°C / -22°F - 158°F		-30°C - 70°C / -22°F - 158°F	
Cooling	Thermostatically Controlled Fan		Thermostatically Controlled Fan		Thermostatically Controlled Fan	
AC Receptacle	Dual Receptical		Dual GFCI		Dual GFCI	
Dimensions (LxWxH) mm	200 x 132 x 72		237 x 155 x 72		295 x 180 x 72	
inches	8 x 5.3 x 2.9		9.3 x 6.1 x 2.8		11.6 x 7.1 x 2.8	
Weight kg / lbs	2.7 / 5.9		3.5 / 7.7		2.7 / 5.9	
Warranty	2 Years		2 Years		2 Years	
Inverter Install Kit	Auto Utility Adapter	Battery Ring Terminal Connection	Anderson Lug Terminals		GP-DC-KIT2	
UPC	8-39085-00057-1	8-39085-00135-6	8-39085-00004-5	8-39085-00060-1	8-39085-00007-6	8-39085-00018-2

*Specifications subject to change without notice

